


LOCK INTO THE ACSI ADVANTAGE



SERIES 6100 COMMUNICATING BATH DOOR SYSTEM

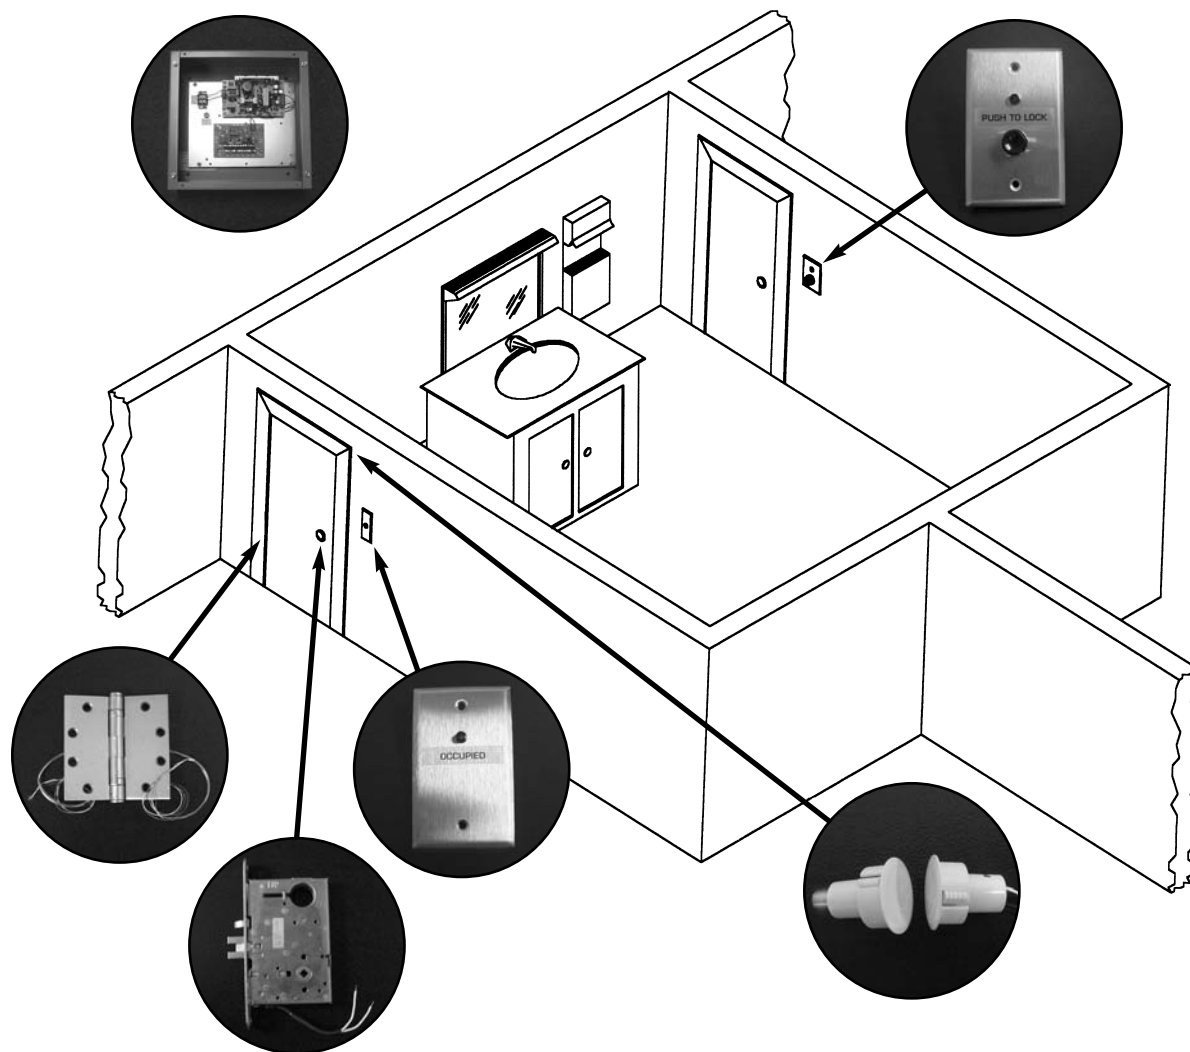

SERIES 6100 COMMUNICATING BATH DOOR SYSTEM


The ACSI Series 6100 System is designed to coordinate access to a common bathroom facility from adjoining rooms. This System allows more efficient utilization of floor space in facilities by eliminating the need for a bathroom in each room.

Features

- Fail safe system - doors will unlock when power is removed
- Free egress at all times
- User privacy
- Eliminates accidental lock-out of either room to the bathroom
- Mechanical key override allows personnel to enter during an emergency
- 1400-6100 Power supply provided

Options

- Series 6100 System will require one of the following electric locking devices:
 - A** (2) mortise or cylindrical locks with ACSI 1510C-00-1-24VDC/AC modifications plus (2) ACSI Series 1100 Electric Hinges
 - B** (2) 8500-M-PL-24VDC/AC Gemini Locking Systems
- 1320-1 push button switch, normally closed, located above outside doors (used for emergency release).

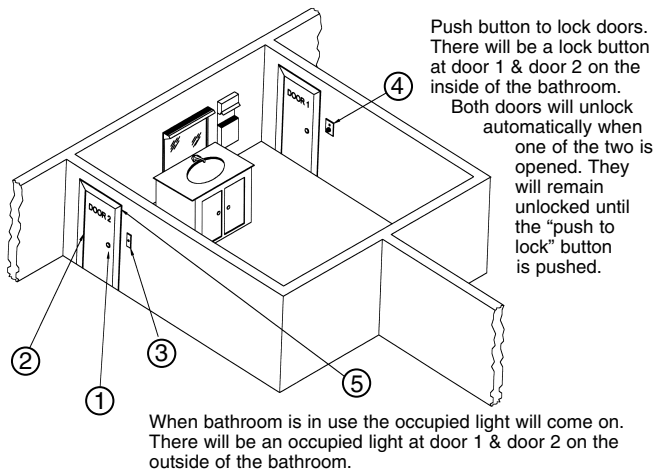

Item	Qty	Description
1	2 Each	Fail Safe locks. Specify one of the following locks: • M1510C-00-1-24VDC/AC* • C1510C-00-1-24VDC/AC* • 8500-M1-PL-24VDC/AC*
2	2 Each	Electric hinges, Model 1104 (Not required on 8500 locking device)
3	2 Each	Indicators marked "Occupied"
4	2 Each	Push buttons with indicator marked "Push to Lock"
5	2 Each	Door position switches
6	1 Each	1400-6100 Power Supply, 24DC @ 2 amp (not pictured)

Description of System Function

When the bathroom is not occupied, both doors are unlocked, and all indicators are extinguished. Upon entering the bathroom from one of the rooms, the occupant depresses the inside push-button switch to lock both doors (both doors must be closed in order for them to lock). When the doors lock, the red indicators inside the bathroom indicate that both doors are locked from the outside. The green indicators outside the bathroom denote that the bathroom is occupied. **(Note:** Both doors are always free egress and can always be unlocked mechanically from the outside with a key). When the occupant exits either door, both doors automatically return to the unlocked condition and all indicators are extinguished.

HOW TO ORDER

1. Series 6100 System



2. Electric Locking Device Required



The Series 6100 System requires one of the following options:

- A.** 2-M1510C-00-1-24VAC (Electric Mortise Locks)
- B.** 2-C1510C-00-1-24VAC (Electric Cylindrical Locks)
- C.** 2-8500-M1-PL-24VAC (Gemini Locking System)

Note: Specify lock manufacturer being used - i.e. Schlage, Corbin, Sargent, Yale, etc.

3. Series 1104 Electric Hinges



Series 6100 System requires (2) ACSI Series 1104 electric hinges if options A or B are supplied.

Please specify manufacturer, weight, size, and finish of the hinge required.

- i.e. Hager BB1279 4.5 x 4.5 - 26D - 1104
- Stanley FBB191 5 x 4.5 - 10B - 1104

Example:

- 6100 - A - BB1279 4.5 x 4.5 - 26D - 1104
- 6100 - B - FBB191 5 x 4.5 - 10B - 1104

* **Note:** Electric lock/Gemini option and electric hinge option are not included in the Series 6100 price.