


1102-10 HINGE TEMPLATE

MODEL 1100-10, 1100-12, 1102X4, 1108-26 & 1100-PG
CONCEALED ELECTRIC THROUGH WIRE HINGE

FOR USE ON ALL MANUFACTURERS

5.0" FULL MORTISE 3 AND 5 KNUCKLE BALL BEARING
HINGES STANDARD AND HEAVY WEIGHT

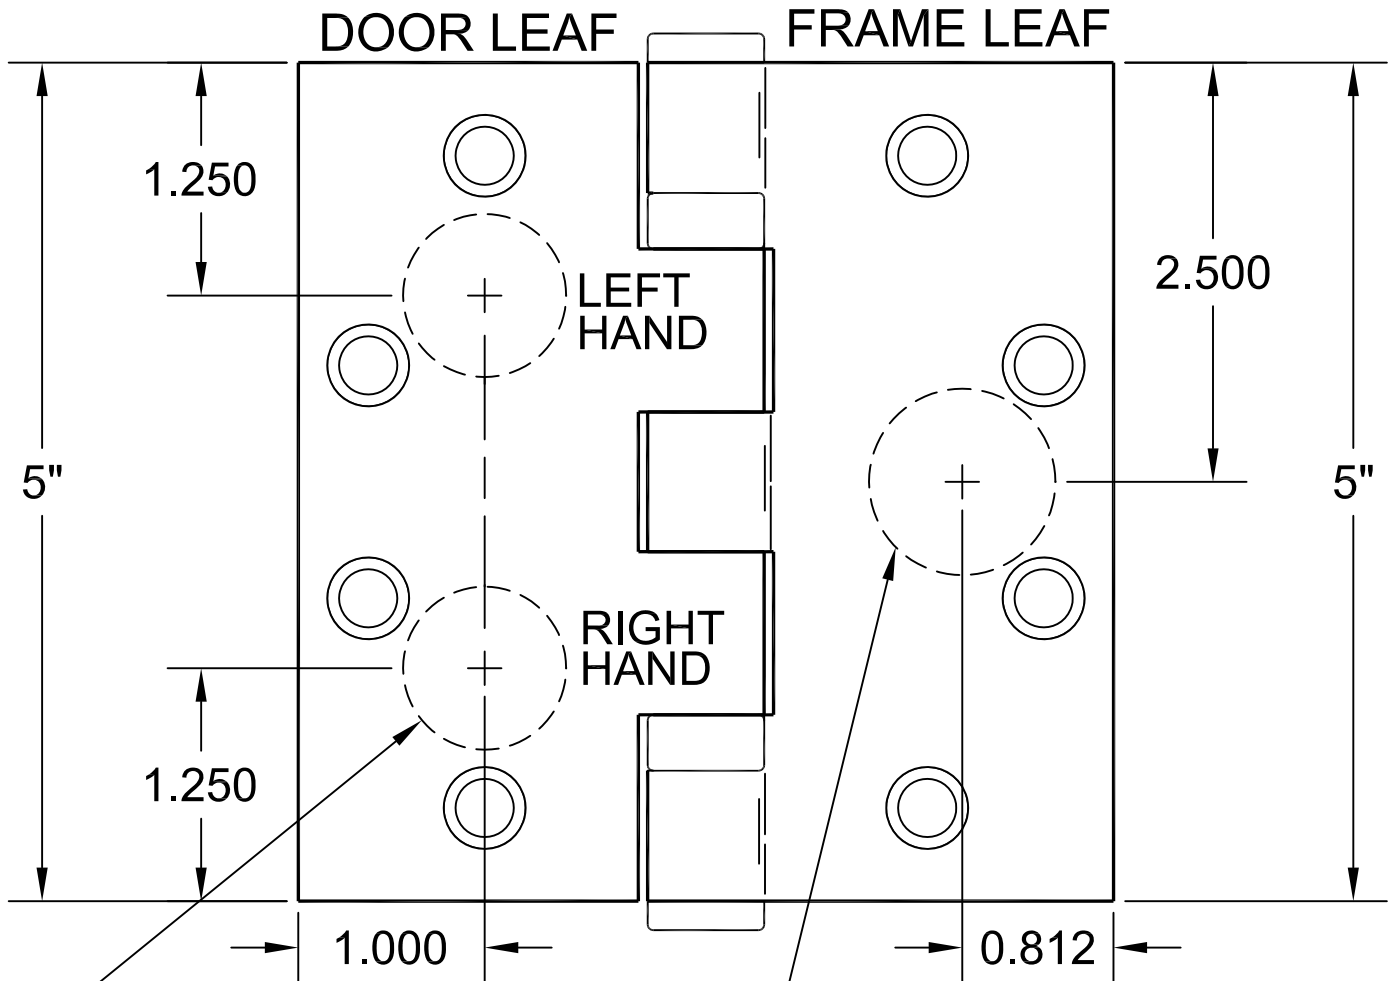

DRILL & DEBURR 7/8" DIA. HOLE
IN DOOR FOR WIRES. DRILL HOLE
PER DOOR HANDING. WOOD DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

DRILL & DEBURR 1" DIA. HOLE
IN FRAME REINFORCEMENT
FOR WIRES. WOOD FRAME
APPLICATION REQUIRES 2"
MINIMUM DEPTH.



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.