


1102-14 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108 CONCEALED
ELECTRIC THROUGH WIRE HINGE

FOR USE WITH ALL MANUFACTURERS
4.5" FULL MORTISE 3 KNUCKLE BALL BEARING
HINGES STANDARD AND HEAVY WEIGHT

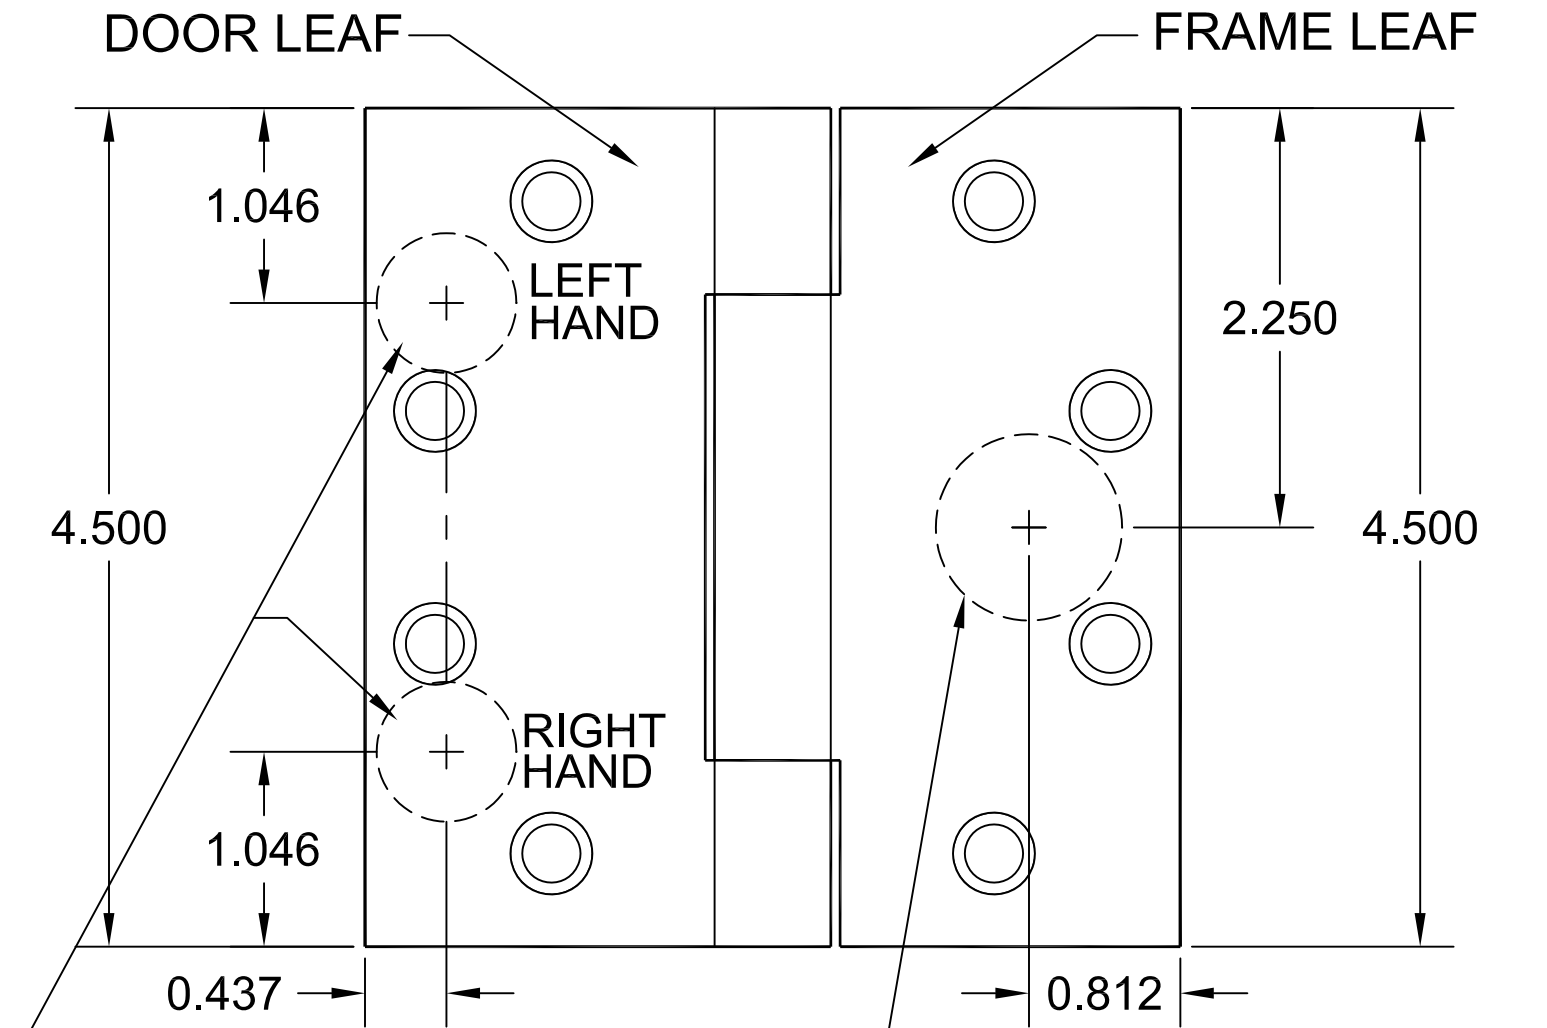

DRILL & DEBURR 3/4" DIA. HOLE
IN DOOR FOR WIRES. DRILL HOLE
PER DOOR HANDING. WOOD DOOR
APPLICATION REQUIRES 2" MINIMUM
DEPTH.

DRILL & DEBURR 1" DIA. HOLE
IN FRAME REINFORCEMENT
FOR WIRES. WOOD FRAME
APPLICATION REQUIRES 2"
MINIMUM DEPTH.



HINGES ARE NON-LOAD BEARING
AND MUST BE MOUNTED
IN THE CENTER POSITION ONLY.