

1102-19 HINGE TEMPLATE

MODEL 1102, 1104, 1106 & 1108


CONCEALED ELECTRIC THROUGH WIRE HINGE

FOR USE WITH ALL MANUFACTURERS

5.0" FULL MORTISE SWING CLEAR

3 & 5 KNUCKLE BALL BEARING

HINGES STANDARD AND HEAVY WEIGHT

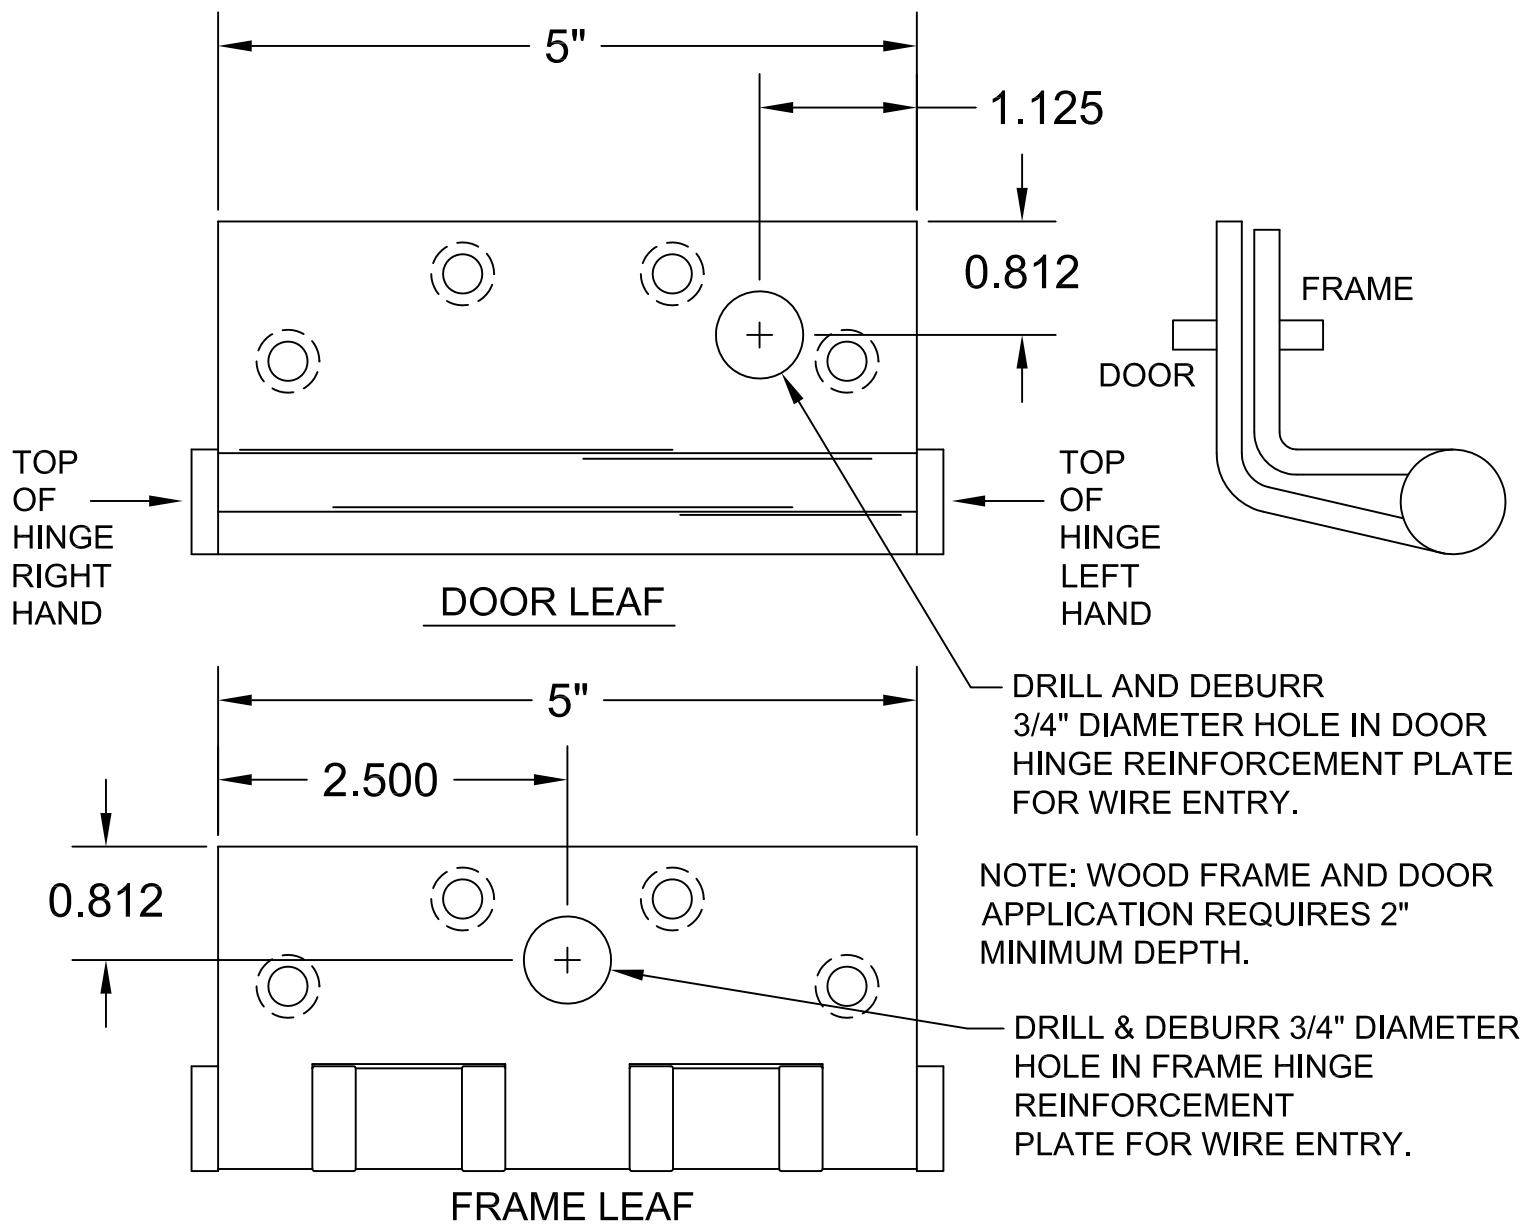

DRILL AND DEBURR 3/4" DIAMETER HOLE IN DOOR HINGE REINFORCEMENT PLATE FOR WIRE ENTRY.

NOTE: WOOD FRAME AND DOOR APPLICATION REQUIRES 2" MINIMUM DEPTH.

DRILL & DEBURR 3/4" DIAMETER HOLE IN FRAME HINGE REINFORCEMENT PLATE FOR WIRE ENTRY.



HINGES ARE NON-LOAD BEARING AND MUST BE MOUNTED IN THE CENTER POSITION ONLY.